




Shandong Chik Bearing Co., Ltd.

INA PASE35-N bearing units

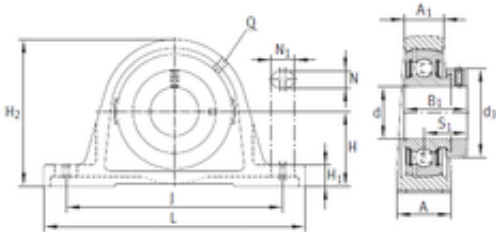

PASE35-N Bearing 2D drawings and 3D CAD models

Bearing No. PASE35-N

Bore Diameter	35 mm
d	35 mm
S1	29,5 mm
Thread (Q)	Rp1/8
d3	51 mm
A	45 mm
A1	27 mm
B1	39 mm
H	47,6 mm
H1	19 mm
H2	93 mm
J	126 mm
L	163 mm
N	14 mm
N1	21 mm
Weight	1,57 Kg
Basic dynamic load rating (C)	25,5 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	1.832
EAN	4012802838596
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar



Shandong Chik Bearing Co., Ltd.

Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GRAE35NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Spherical Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 35MM Bore; 47.6MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 122.1MM Minimum Bolt Spacing; 137.9MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Lip Co
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	PASE35N
Weight / LBS	3.749
Base to Center Height	1.874 Inch 47.6 Millimeter
Nominal Bolt Center to Center	5 Inch 127 Millimeter
Bolt Spacing Maximum	5.429 Inch 137.9Millimeter
Length Thru Bore	1.531 Inch 38.9 Millimeter
Bore	1.378 Inch 35 Millimeter



Shandong Chik Bearing Co., Ltd.

Bolt Spacing Minimum	4.807 Inch 122.1Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter